



Vaasan yliopisto  
UNIVERSITY OF VAASA

**OSUVA** Open  
Science

This is a self-archived – parallel published version of this article in the publication archive of the University of Vaasa. It might differ from the original.

## Voltage and current THD in microgrid with different DG unit and load configurations

**Author(s):** Laaksonen, Hannu; Kauhaniemi, Kimmo

**Title:** Voltage and current THD in microgrid with different DG unit and load configurations

**Year:** 2008

**Version:** Publisher's PDF

**Copyright** ©2008 International Conference and Exhibition on Electricity Distribution CIRED

### Please cite the original version:

Laaksonen, H., & Kauhaniemi, K., (2008). Voltage and current THD in microgrid with different DG unit and load configurations . In: *CIRED Seminar 2008: SmartGrids for Distribution. 23rd-24th June 2008, Frankfurt, Germany*, paper 0057. <https://pdfs.semanticscholar.org/9a9f/41f5e115af3d0aea398ba941a43fc3b1151b.pdf>

## VOLTAGE AND CURRENT THD IN MICROGRID WITH DIFFERENT DG UNIT AND LOAD CONFIGURATIONS

Hannu LAAKSONEN  
University of Vaasa – Finland  
hannu.laaksonen@uwasa.fi


Kimmo KAUHANIEMI  
University of Vaasa – Finland  
kimmo.kauhaniemi@uwasa.fi

### ABSTRACT

After microgrid transition from the normal operation to the islanded operation the system impedance changes considerably and it affects on the harmonic voltages of the microgrid. In this paper the voltage and current THD before and after islanding are studied with different microgrid configurations. Simulations are also made by applying negative sequence filtering in control system of converters to reduce the voltage and current THD in microgrid during unsymmetrical load. Based on the studies recommendations for technical solutions which ensure high power quality in islanded microgrid are given.

### INTRODUCTION

Microgrids are distribution systems with DG units, energy storages and controllable loads, which can be operated parallel with utility grid or in an island mode (Fig. 1). Microgrid can be disconnected from the utility grid as a consequence of disturbances in the utility grid or due to planned switching events.

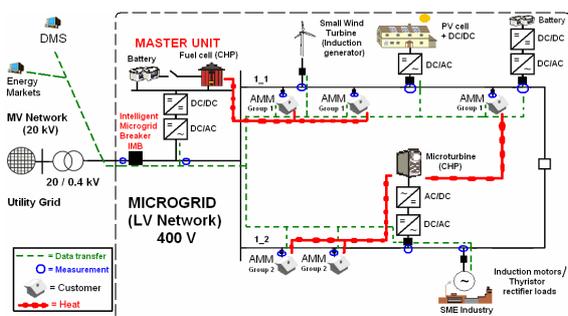

**Figure 1.** Example of a LV network microgrid.

An increasing demand for the reliable, high quality power and an increasing number of distorting loads have led to an increased awareness of power quality both by customers and utilities. In addition, most of the distributed generation (DG) units connected in future to low voltage (LV) network microgrids will be converter based. These DG unit converters together with possibly existing nonlinear loads have potential to distort the voltage waveform even more. This paper studies the voltage and current THD before and after islanding in the microgrid with different microgrid configurations (Fig. 1). In table 1 eight studied microgrid configurations are listed, including the reference case 1. In reference case 1 there are converter based master unit, 2 converter based DG units and balanced passive load in microgrid. All converters are SVM (Space vector

modulation) modulated with 8 kHz switching frequency and equipped with passive LCL-filters as well as battery and dc-dc converter connected to their dc-links to model the energy source. In case 1 the LV network lines of the microgrid are weak i.e. the R/X-ratio is high. Differences of each simulated cases to the reference case 1 can be seen from table 1. The studies are made with PSCAD simulation software package.

**Table 1.** Studied microgrid configurations

Case	Difference in microgrid configurations
1.	Reference case
2a.	Lower (6 kHz) switching frequency on converters
2b.	Lower (4kHz) switching frequency on converters
3.	Lower R/X-ratio on LV network lines
4.	Thyristor rectifier (TR) load
5a.	Induction motor (IM) load
5b.	Induction motor (IM) load and unbalanced passive load
6.	L-filters on converters
7.	PWM (Pulse width modulation) modulated converters
8.	Constant DC voltage source in the dc-link of converters

### HARMONIC DISTORTION IN MICROGRID

Harmonic distortion in power systems is caused by nonlinear devices in which the current is not proportional to the applied voltage. The response of the power system i.e. the system impedance at each harmonic frequency determines the impact of the nonlinear load on harmonic voltage distortion. Various organizations on the national and international level have made standards both for individual and total harmonic distortion of voltage in the LV networks. For example standards IEC 61000-2-2 and EN 50160 define that the THD of the supply voltage including all harmonics up to 40<sup>th</sup> order shall be less than 8 %. For distributed generation units usually more tight limits for voltage individual and total harmonic distortion are defined. These standards do not take into account the possible harmonics near the converter switching frequency (e.g. 160<sup>th</sup> / 8 kHz). It is possible that these higher order harmonics caused by converters may resonate with the system impedance, which in turn will cause voltage waveforms with multiple zero crossings that can disturb the timing circuits etc. [1] When the microgrid transfers from the normal operation, parallel with utility grid, to the islanded operation the grid impedances and the harmonic voltages will change. Therefore, during the island operation the microgrid is much weaker and more sensitive to disturbances and especially the harmonic currents produced by converters and possible distorting loads will generate much higher harmonic voltages. To overcome possible problems during islanding



By using power quality compensator (PQC) with energy storage as the master unit of microgrid it could also be possible to improve the quality of currents flowing between the microgrid and the utility grid [4].

**Simulation results**

In this section the simulation results from studies about voltage and current THD during normal and island operation of microgrid with different configurations are presented as well as the effect of negative sequence filtering on THD.


**Voltage and current THD with different configurations**

In table 4 the voltage and current THD before and after islanding in the microgrid with different microgrid configurations (table 1). In Fig. 5 the voltage and current THD from different cases during island operation are shown as a bar graph. From table 4 can be seen that the reduction of switching frequency of converters from 8 to 4 kHz (case 2b) increases notably the voltage harmonic distortion both in normal and island operation with the used LCL-filter parameters on converters (table 3). Also the effect of thyristor load (case 4) to the harmonic voltage distortion and the current THD of the DG unit converter next to it is obvious especially during island operation (Fig. 5). With PWM modulation (case 7) and with modeling the energy source as constant dc source (case 8) the voltage and current THD are slightly higher than in reference case 1. The most significant increase in voltage THD during normal and especially during island operation is experienced in case 6 when L-filters are used on converters instead of LCL-filters.

**Table 4.** Voltage and current THD (255 harmonics) in microgrid with different configurations


Case	Before Islanding ( $U_{THD}/I_{THD}^{**}$ )	During Islanding ( $U_{THD}/I_{THD}^{**}$ )
1.	0.40 / 0.24	1.17 / 0.26
2a.	0.73 / 0.36	2.11 / 0.32
2b.	2.00 / 1.08	5.08 / 0.61
3.	0.42 / 0.27	1.17 / 0.26
4.	0.58 / 1.23	5.39 / 3.02
5a.	0.41 / 0.27	1.16 / 0.29
6.	2.71 / 0.7	25.01 / 0.40
7.	0.60 / 0.52	1.85 / 0.43
8.	0.44 / 0.36	1.37 / 0.33

<sup>\*</sup>From phase C in connection point of master unit, <sup>\*\*</sup>From phase A in connection point of DG Unit 1 on feeder 1\_1

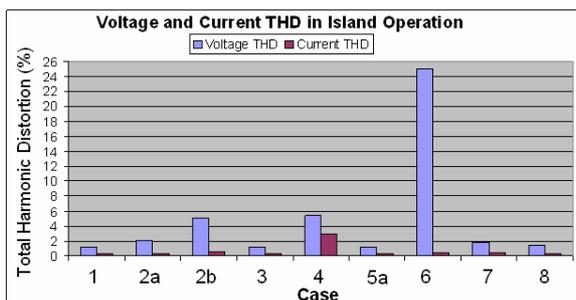

**Figure 5.** Voltage and current THD (%) in different cases (from table 4) during island operation of microgrid.


With L-filter especially the higher order harmonics are not filtered out from the output current of the converters very effectively. Another reason for the high voltage THD in case 6 can be seen from Fig. 6 where the system harmonic impedance from point 1 (Fig. 2) in some cases during normal and island operation are presented. Especially during island operation the high resonance peak in case 6 near the switching frequency of converters will increase the voltage THD very significantly while the current THD is reasonably low (table 4).

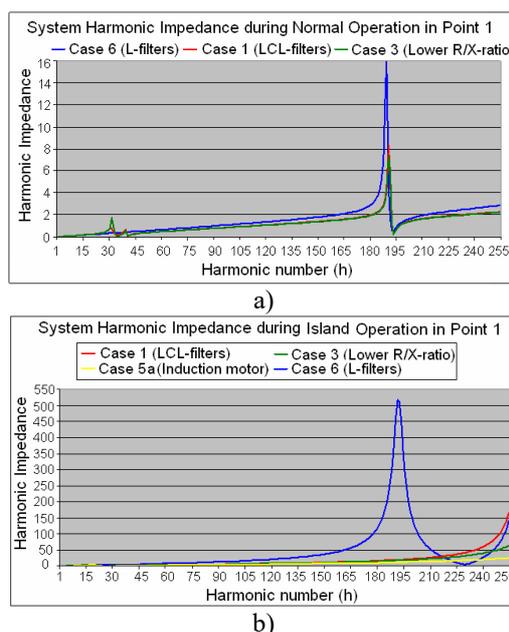

**Figure 6.** System harmonic impedance during a) normal and b) island operation of microgrid in cases 1, 3, 5a and 6.

**The effect of negative sequence filtering on THD**

In addition to the previous simulation results with different microgrid configurations (table 4), the simulation results with cases 5a and 5b (table 1) are presented in table 5. The simulations are done to show the possibility to reduce the microgrid voltage and current THD during unsymmetrical faults and/or unbalanced load by using negative sequence filtering [5] in control system of converters (see Fig. 4). From Fig. 7 the effect of unbalanced load on phase voltages during normal and island operation can be seen.

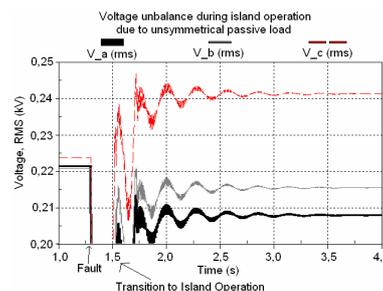

**Figure 7.** Voltage unbalance in simulations during island operation due to unsymmetrical passive load.

**Table 5.** The effect of negative sequence filtering in control system of converters to voltage and current THD (255 harmonics) of microgrid in cases 5a and 5b.

Neg. Seq. filtering	Before Islanding ( $U_{THD}^*/I_{THD}^{**}$ )	During Fault*** Before Islanding ( $U_{THD}^*/I_{THD}^{**}$ )	During Islanding ( $U_{THD}^*/I_{THD}^{**}$ )
5a. No	0.41 / 0.27	0.75 / 8.70	1.16 / 0.29
5b. No	0.42 / 0.44	1.01 / 8.90	1.70 / 1.11
5a. With PLL	0.41 / 0.27	0.54 / 6.1	1.16 / 0.29
5b. With PLL	0.42 / 0.41	0.81 / 6.23	1.70 / 1.12
5a. With PLL & $I_{ref}$	0.41 / 0.27	0.19 / 0.20	1.14 / 0.25
5b. With PLL & $I_{ref}$	0.41 / 0.28	0.25 / 0.21	1.15 / 0.31

\*From phase C in connection point of master unit, \*\*From phase A in connection point of DG Unit 1 on feeder 1\_1, \*\*\*Unsymmetrical 2-phase earth fault (A-B-ground) in utility grid

From the simulation results of table 5 it can be seen that the unsymmetrical passive load in case 5b increases the voltage and current THD in microgrid especially during islanding when the difference between phase voltage magnitudes (Fig. 7) is larger when compared to case 5a. The negative sequence filtering with PLL can be done to improve the stability of the converter based unit especially during unsymmetrical faults. From simulation results of table 5 one can see that by using negative sequence filtering with PLL the voltage and current THD is slightly reduced in cases 5a and 5b. However, when negative sequence is filtered from the current reference  $I_{ref}$  in converter control system (Fig. 4) the current THD is reduced in case 5b during normal operation and also during unsymmetrical fault before islanding the voltage and current THD in cases 5a and 5b is significantly reduced (table 5). In addition, after islanding the distortions in voltage and current are notably lower. However, the negative sequence filtering from current reference  $I_{ref}$  does not remove the ripple from dc-link voltage during unsymmetrical fault.

## CONCLUSIONS

Based on the simulation results it is obvious that voltage THD behaviour cannot be foreseen from the current THD contribution of the converter when operating normally parallel with utility grid. They are affected by the particular system harmonic impedance in that point and the harmonics coming from other devices (i.e. background harmonic voltages) which are dependent on the configuration, control system and parameters of these devices. When the microgrid transfers from normal to islanded operation the grid impedances and the harmonic voltages will change. Therefore, during the island operation of the microgrid there is a risk that some higher order harmonics near the switching frequency of the converter may resonate with the changed system harmonic impedance and even without resonances the harmonic currents produced by converters and possible distorting loads will generate much higher

harmonic voltages during island operation. Summary about the findings to ensure high power quality in islanded microgrid is presented in Fig. 8.

1. LCL-filters must be used with converter based DG units in microgrid
  - To reduce the amount of current harmonics fed to microgrid, also higher order harmonics near the switching frequency
  - To avoid possible resonance between system harmonic impedance in different microgrid configurations during normal or island operation
    - This could be ensured by using adaptive switching frequency with converters e.g. between 6-10 kHz if normally 8 kHz i.e. in case of resonance in some higher order harmonics the switching frequency of converters is automatically changed
2. The amount of thyristor rectifier loads directly connected to microgrid must be in reasonable limits (max. 15-20 % of the total load)
  - IGBT component based converters must be preferred in all new devices connected to microgrid
3. Space vector modulation (SVM) is preferred when compared to PWM
  - Due to lower voltage and current THD in microgrid
4. The use of the negative sequence filtering in control system of the converters is beneficial during unbalanced load or unsymmetrical faults
  - The voltage and current THD are reduced
  - In real life the phases in microgrid will be more or less unbalanced
  - Naturally it is possible to use some other method which has similar effects

**Figure 8.** Summary from the findings to ensure high power quality in islanded microgrid.

## Acknowledgments

The authors want to express their thanks to Tekes, the Finnish Funding Agency for Technology and Innovation, and companies for their financial support in *Energy storage for managing distributed generation* -project which is part of Tekes Distributed energy systems technology programme (DENSY) 2003-2007.

## REFERENCES

- [1] R.C. Dugan, M.F. McGranaghan, S. Santoso, H.W. Beaty, 2002, *Electrical Power Systems Quality*, Second Edition, McGraw-Hill.
- [2] H. Laaksonen, K. Kauhaniemi, 2007, "Sensitivity Analysis of Frequency and Voltage Stability in Islanded Microgrid", *Proc. 19th International Conference and Exhibition on Electricity Distribution (CIRED)*, Vienna, Austria.
- [3] H. Laaksonen, K. Kauhaniemi, 2007, "Fault Type and Location Detection in Islanded Microgrid with Different Control Methods based Converters", *Proc. 19th International Conference and Exhibition on Electricity Distribution (CIRED)*, Vienna, Austria.
- [4] H. Laaksonen, K. Kauhaniemi, 2008, "New Concept for Power Quality Management in Microgrid with Energy Storage Based Power Quality Compensator", *International Journal of Distributed Energy Resources (DER Journal)*, vol. 4 no. 2.
- [5] S-J. Lee, J-K. Kang, S-K. Sul, 1999, "A New Phase Detecting Method for Power Conversion Systems Considering Distorted Conditions in Power System", *IEEE IAS Annual Meeting*, vol. 4, pp. 2167-2172.